


Comfort Series

SUBMITTAL DATA © 1999

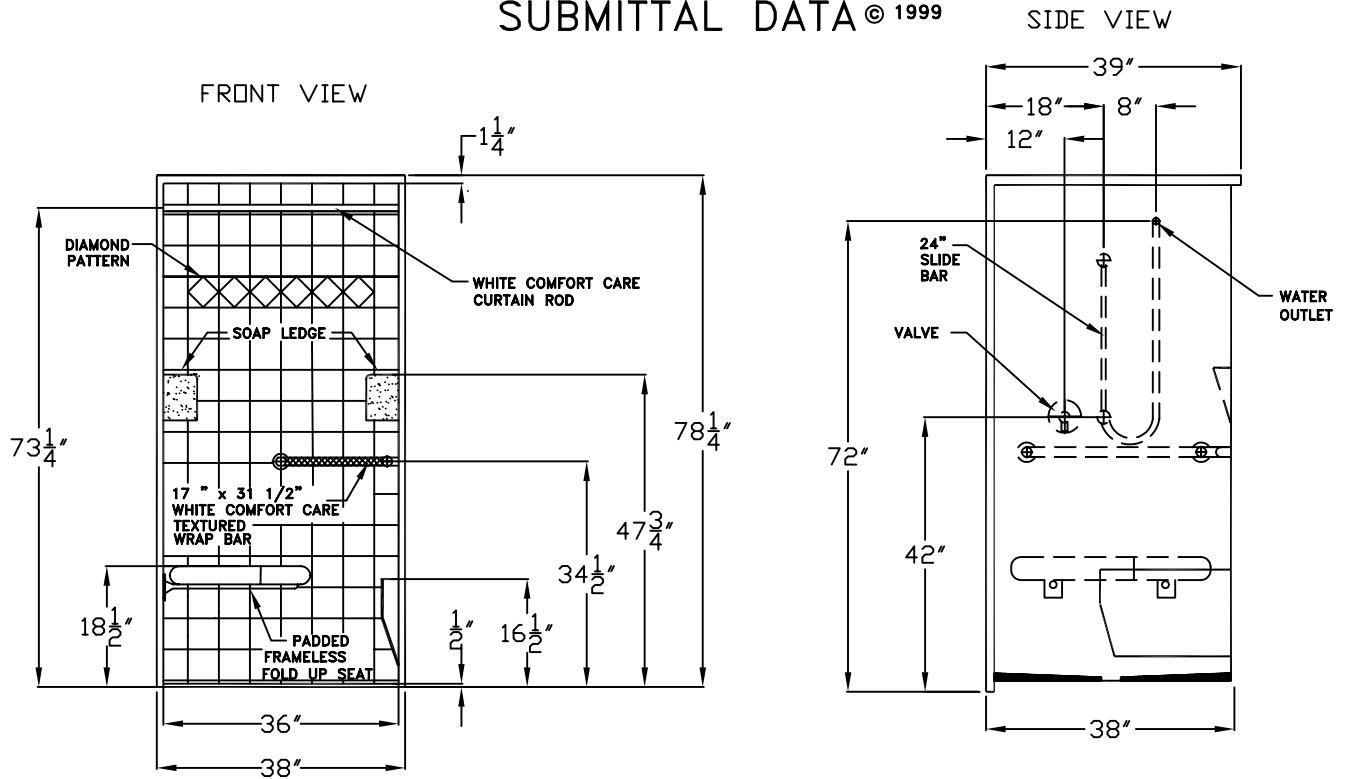

Transfer Shower Stall

The shower enclosure shall be Comfort Designs Model XST3838BFADA.5 right or left. Finished surface shall be of a sanitary-grade polyester Gelcoat exhibiting a minimal thickness of 15 dry mills, and a finished cured Barcol hardness of 80-90 as tested with ASTM D-2583. Unit construction shall be of molded reinforced fiberglass with a 15% minimum fiberglass content. The unit shall have outside dimensions of 38" x 39" x 78 1/4". The base shall be attached to the sump of the unit in such a manner to form and integral part with an inner and outer coating of reinforced polyester resin. The unit shall meet ANSI 117.1, ANSI 124.2, ADA, HUD, BOCA, NAHB, UPC, and shall meet the requirements of Southern Building Code.

The enclosure shall be equipped with the following installed accessories:

- 1) one 17" x 31 1/2" white Comfort Care textured wrap bar x 1 1/2" diameter, 18 gauge stainless steel grab bars with 1 1/2" statute clearance, mounted with stainless steel bolts and secured from the rear with a 3" x 3" x 11 gauge metal mounting plate,
- 2) 1" diameter white Comfort Care curtain rod,
- 3) 1/2" threshold,
- 4) frameless fold up seat,
- 5) molded soap dish,
- 6) tile finish,
- 7) diamond pattern,
- 8) foot ledge,
- 9) valve package.

Available Options: 1) Hand held shower set (Includes: hand set, 60" flex hose, swivel connector, vacuum breaker, brass nipple, locknut, wall brackets and shower wall outlet), 2) Factory installed fold up seat, 3) 24" or 30" slide bar, 4) Pressure balance valve, 5) Green shower curtain, anti-bacterial, and hooks, 6) White shower curtain and hooks.

NOTE: THIS UNIT WILL NOT ACCEPT A DOOR!

DO NOT ROUGH-IN ON THE VALVE SIDE UNTIL THE UNIT IS RECEIVED AND IN PLACE.

DUE TO THE NATURE OF THE MATERIALS DIMENSIONS MAY VARY ± 1/2"

Job Name:		COMFORT DESIGNS	
Model No.:		Drawing#: XS383817	
Approved by:	Date Approved:	Date: 7-24-00	Revised: 1-5-06
Rep.:	Wholesaler:	Quote No.:	